

LEHUI MICRODAT

CF55+ CASK FILLER CW60 CASK WASHER



First Choice For Cask Breweries

Lehui's CF55+ single-head filler and CW60 double-head cask washer are especially designed for those small and medium-sized cask breweries which pursue high quality beer. With a maximum capacity of 60 casks per hour, compared with similar products, our combination of scheme will better meet the breweries' requirements of capacity and performance.

Machine Features

□ Extra Sanitary Design, Healthy and Safe

- ▶ The whole machine is manufactured from SS304, and it is fully sanitary by using food-grade hose pipe for connecting.



□ Stable and High Accuracy Filling

- ▶ Lehui's sanitary peristaltic pump delivers beer and adds auxiliary materials on line, which enables a gentle reliable filling.



- ▶ High accuracy flow meter is adopted to ensure precise metering.
- ▶ The pump station can be separated for independent beer delivering, CIP cleaning and yeast delivering.
- ▶ The sanitary peristaltic pump is especially developed and manufactured by Lehui, combined with automatic control of online flow meter, gentle and accurate filling of foamless beer can be realized.

□ Efficient and Low Energy Consumption Cleaning


- ▶ Efficient, high pressure cleaning and rinsing, no dead corners, no residues, complete coverage of cleaning range.



- ▶ Low water consumption, with no need for draining and pre-rinsing, 6-8 Liters of water per cask on average. More than 75% water is recycled for pre-rinsing.
- ▶ Integrated design of water tank, for pre-rinsing and cleaning.
- ▶ Satisfy the cleaning of different cask sizes (depend on requirements).

Product Advantages

- ▶ Easily upgrade to expand capacity to 80 casks per hour by adding a head.

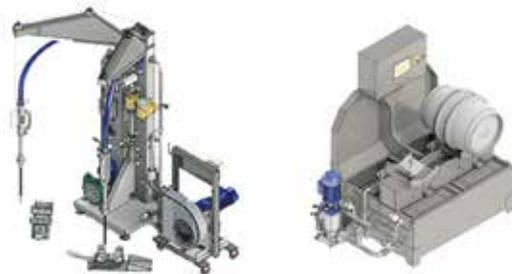

- ▶ Low consumption--beer flow rate control to ensure more filling and less foam loss.
- ▶ High-efficiency--less cleaning and filling time enable operators to process multiple tasks at the same time.
- ▶ Stability--not affected by the volume of casks, cleaning and filling time are stable.
- ▶ Ergonomic design--reducing bending and back strain of workers.

Technical Data

Data \ Model	CF55+	CW60
Working Heads	Single-head, Extendable	Double-head, Extendable
Capacity	50-60 Casks Per Hour	50-60 Casks Per Hour
Material	SS304	SS304
Dimension (L*W*H)	1100*1400*2300	1700*1200*1650
Power	1.5kW	10.1kW
Weight	350kg	330kg
Water/Steam/CIP/CO ₂	According To Lehui Standards	
Sterile Air	Oil Free, Dry, >5bar	
Voltage	AC127/220-240V,50HZ	

Options

- ▶ Steam sterilization
- ▶ Addition of chemicals
- ▶ Cleaning water tank



- We reserve the right to change the mechanical specifications and designs without prior notice.